

HOW-TO-MEASURE GUIDES

Perfect Fit Pleated and Venetian Measuring, Assembly & Fitting Instructions

Measuring Instructions

Step 1.

Before you begin, ensure there is a clearance of 6mm all around the outside of your window beading to allow enough room for the Perfect Fit (Fig.1).

Step 2. Measure glass size

Measure the width and the drop of your glass size accurately with a digital measuring tape (P9480). We recommend that you measure in both corners and the middle of your window and use the smallest size taken (Fig. 2 & 3).

Step 3. Measure window depth

Measure the depth of the window (Fig. 4) using the depth gauge (P9481). This gives you the measurement from the face of the window frame to the glass (this is normally 20mm/24mm) and will determine the size of the window fixing brackets to be used.



HOW-TO-MEASURE GUIDES

Perfect Fit Pleated and Venetian Measuring, Assembly & Fitting Instructions

How to assemble your Perfect Fit blind

To assemble your Perfect Fit blind, there is a simple assembly procedure to follow before fitting may commence. Carefully unwrap the blind components. Unravel all guides and control cords. The blind will have the top and bottom parts of the frame attached together with cord.

Step 1.

Lay out the blind face down on a clean, even surface.

Step 2.

Select the left hand frame component and guide onto the exposed arm of the bottom left corner joint.


Step 3.

Slide the frame along the arm until secure. Repeat the process on the top left hand corner joint.

Now follow the same procedure for the right hand side of the frame. Once the frame is complete tighten the securing screws attached to each corner joint.

Step 4.

Your Perfect Fit blind is now ready to be fitted.

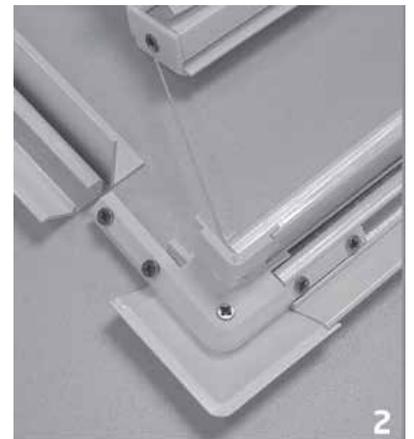

HOW-TO-MEASURE GUIDES

Perfect Fit Pleated and Venetian Measuring, Assembly & Fitting Instructions

How to fit your Perfect Fit blind using the window fixing brackets

Apply lubricant in the form of washing up liquid to the flat base of the window fixing bracket prior to insertion of the bracket between window and rubber seal.

Step 5.

For the correct spacing distance of the brackets (85mm), place the credit card into a corner of the window.

Step 6.

Line up the window fixing bracket at the base of the card (or top of the card depending upon which corner of the window you are working) and fit the bracket by pushing it between the glass and the rubber seal on the window.

Step 7.

Using the credit card guarantees a perfect line up for each of the holes in your frame with each of the brackets

Step 8.

Fit any intermediate brackets accordingly. Clean excess lubricant from window surface prior to fixing frame to brackets.

Step 9.

Take the Perfect Fit frame and offer the left hand side to the left hand brackets. Align the frame holes with the bracket lugs. Click into place. Repeat this process for the right hand side. Now the Perfect Fit frame is locked in position.

To remove the frame use a flat headed screwdriver and depress the bracket lugs while gently easing out the frame.

