


HOW-TO-MEASURE GUIDES

INTU Fitting Guide **Roller**

1. To fit your INTU® Roller Blind you only require the special bracket fitting tool.



2. Fully unpack the blind and lay out all parts supplied

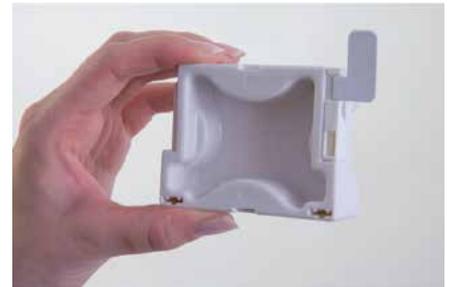

3. The brackets are fitted behind the window bead, all are handed. Locate one of the top brackets into the tool aperture.



4. Insert the bracket behind the rubber seal until the tool edge touches the bead at both top & side. Repeat for other side.



5. Similarly locate one of the bottom brackets in the tool.



6. Insert the bracket behind the rubber seal until the tool edge touches the bead at both bottom & side. Repeat for other side.



7. Side profiles should be evenly vertical. If the window is not square, attach pads supplied on side of profile as needed. Locate the profile bottom end cap over the bottom bracket.



8. Apply pressure to click home the profile top end cap.



9. Fit the side profile retaining clips supplied. Always fit top clips approximately 100mm below top bracket. On longer drops fit additional clips evenly apart.

HOW-TO-MEASURE GUIDES

INTU Fitting Guide

Roller



10. The fascia end caps have 'snap off' sections to allow best fit, adjust to suit installation.



11. Check the position of the 'blind to fascia' retaining brackets are as shown. If not press the finger release lever and move to open position as pictured. Repeat at opposite end. As blind is pre-tensioned do not remove blind from fascia brackets.



12. There are two methods of inserting the bottom bar/fabric into the side profiles. Method 1 (as above) is to slide the bottom bar and fabric into the side channels prior to attaching the fascia assembly (next operation).



13. Carefully position the assembly and locate the fascia brackets over the top window brackets. Only push fascia half way home.



14. In method 2 attach fascia assembly as in step 13. Insert the fabric by carefully tilting up the bottom bar and fabric; locate the lower end into the side profile and then insert the upper end into the opposite profile channel.



15. Slide the end cap down the side profile.

HOW-TO-MEASURE GUIDES

INTU Fitting Guide

Roller



16. To lock the bottom bar at chosen position twist bar to vertical position.



17. Narrow blinds will have one finger grip positioned in the centre of the bottombar. Wider blinds will have two positioned evenly across. Always operate the blind at these positions.



18. Ensuring the fabric is located within the side profile channel, press upwards on the finger release lever and push the fascia fully home. (Should removal of the fascia be desired reverse all processes and simply press upwards on the finger release levers to pull the fascia assembly away from the window).

Summary of Blind Operation



19. To move bottom bar up or down twist bar to open position as shown.



20. To lock bottom bar in position twist bar to vertical position as shown.